


RIGHT HANDLE CONFIGURATION (R)

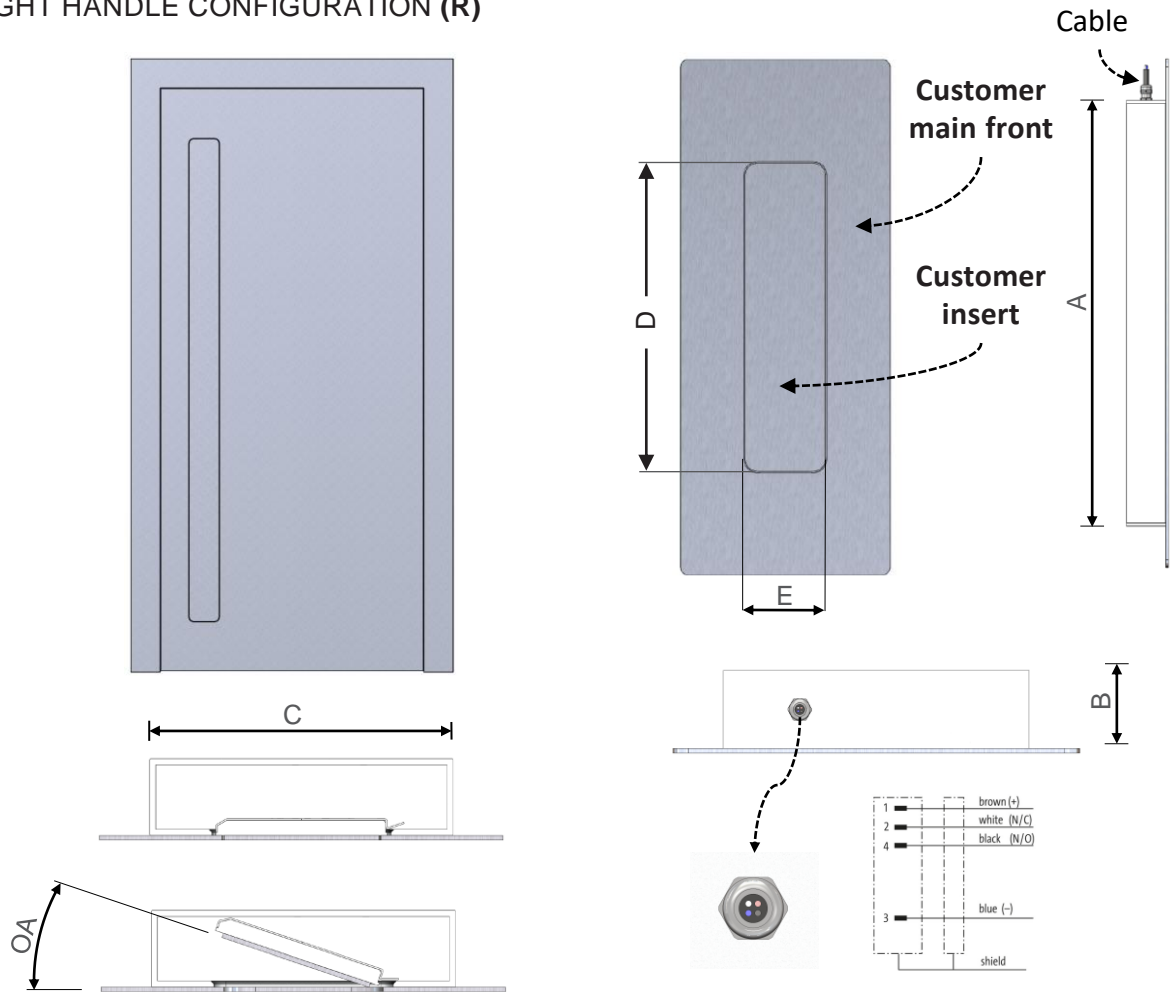

	540 (R)	1000 (R)	1400 (R)	1800 (R)
A [mm]	548	1008	1408	1808
B [mm]	50			
C [mm]	200			
D [mm]	395	855	1255	1655
E [mm]	105	105	105	105
OA [°]	18,5			
Rated voltage	12V			
Rated current	3A			
Mass	9kg	19kg	26kg	33kg
Illumination	White LED			
	<ul style="list-style-type: none"> Color inside of housing RAL 7016 FS Position of extended cable length always on top side 			

Data sheet- MYSTIC LINE


#001

Griffing d.o.o. | Rakitnica 41 | 1331 Dolenja vas | Slovenia, EU
 sales@griffing.si | www.griffing.si


Data sheet | 24/07/2023

GRIFFING

1. STEP – CUSTOMER MAIN FRONT & INSIDE INSULATION CUT OUT

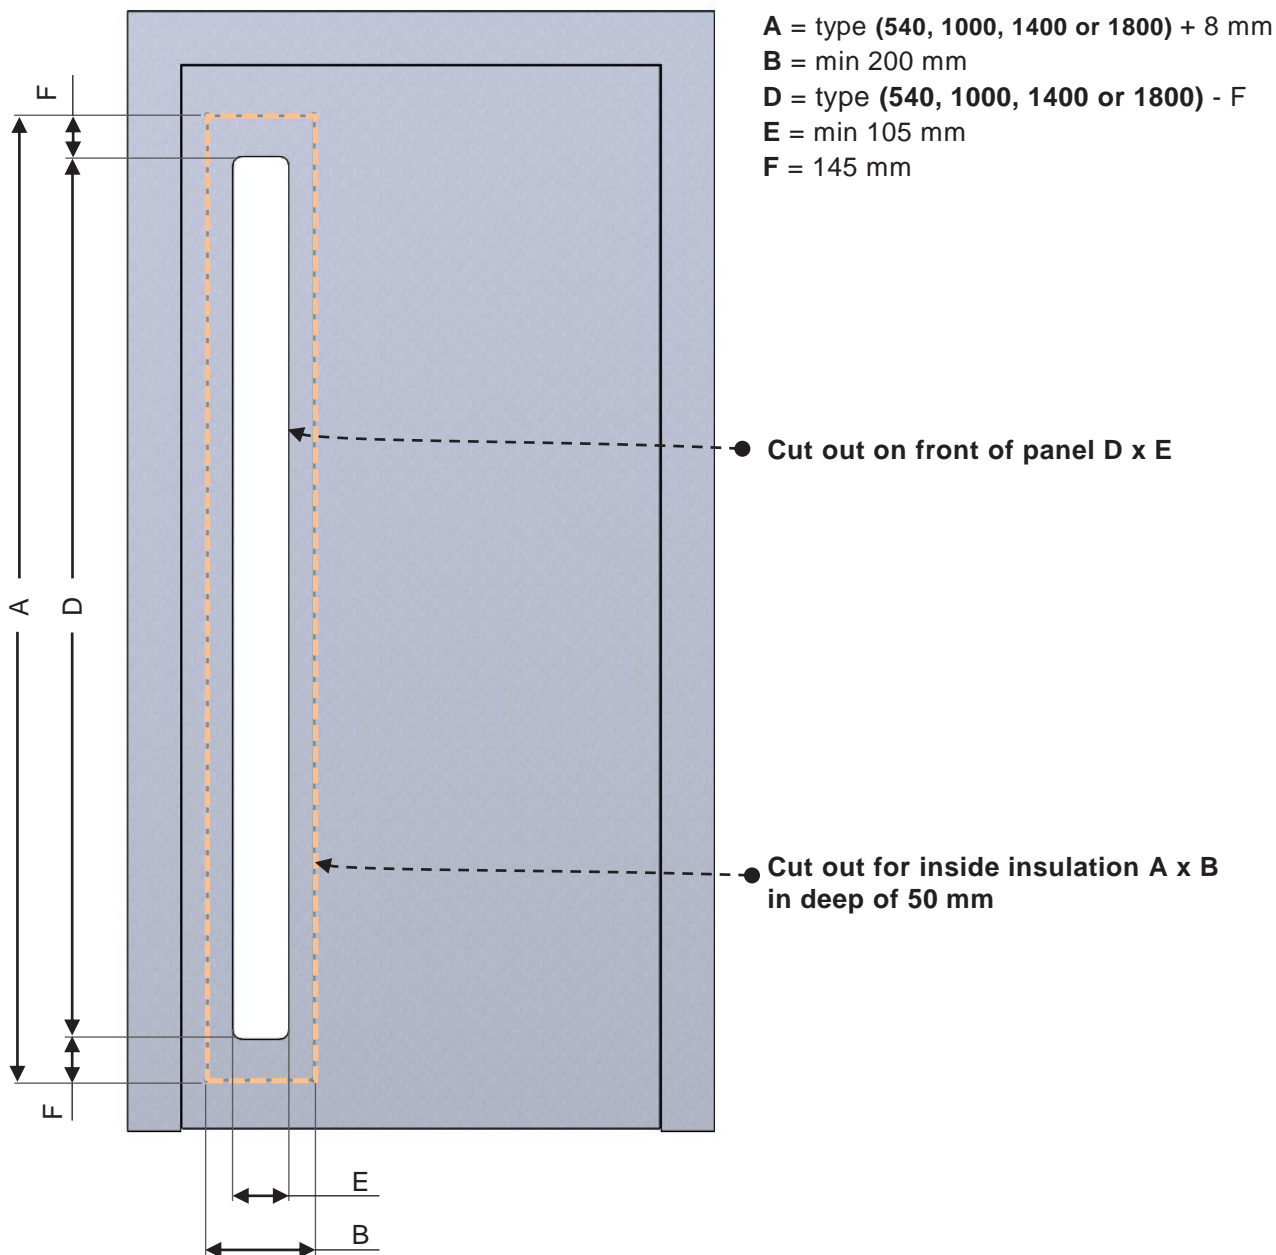

2. STEP – CUSTOMER INSERT

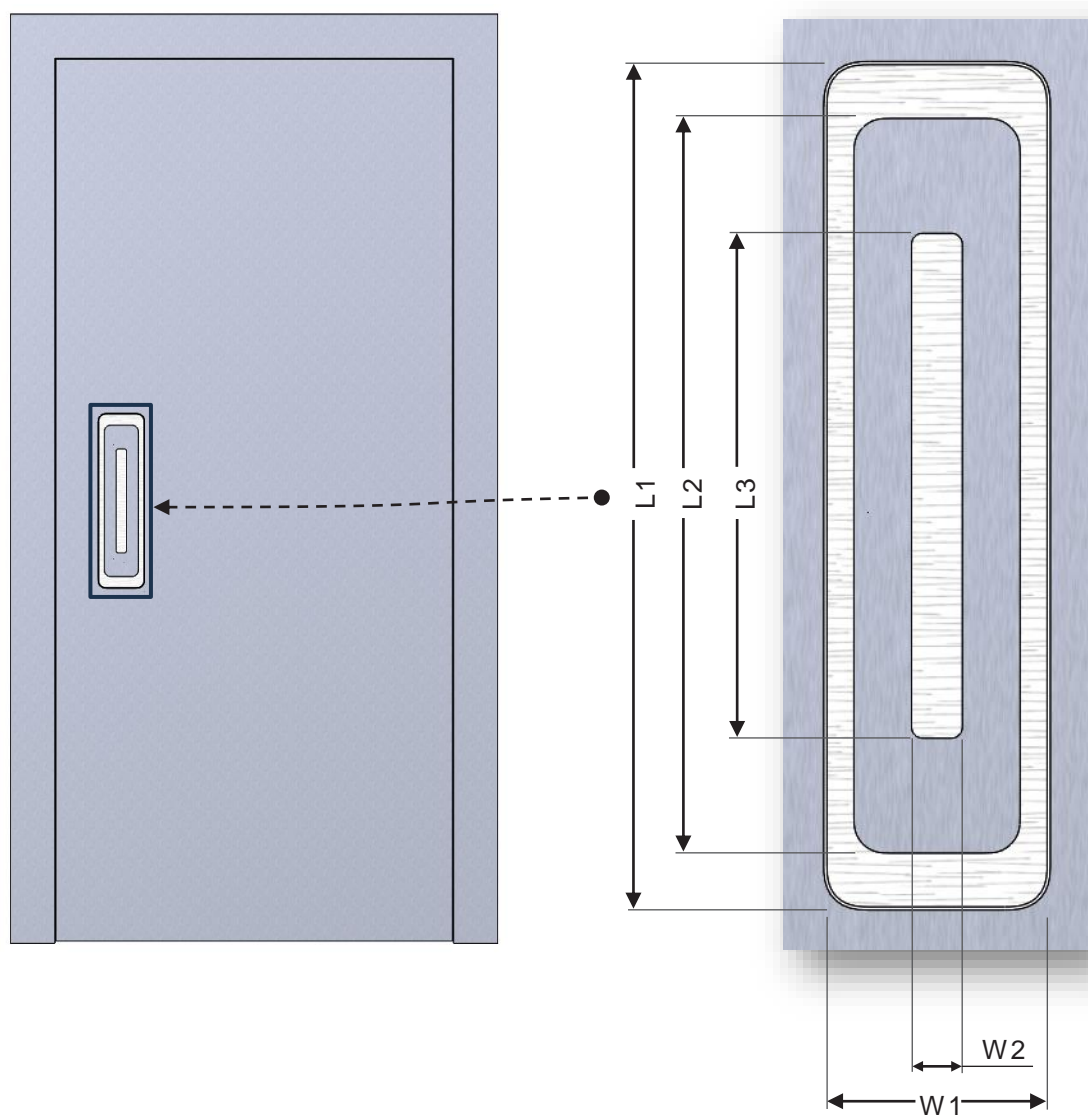

	540	1000	1400	1800
L1 [mm]	392	852	1252	1652
L2 [mm]	342	802	1202	1602
L3 [mm]	235	695	1095	1495
W1 [mm]	102			
W2 [mm]	77-102			
W2 [mm]	23,5			

Tehnični list – MYSTIC LINE


#004

Griffing d.o.o. | Rakitnica 41 | 1331 Dolenja vas | Slovenia, EU
 sales@griffing.si | www.griffing.si

Data sheet | 24/07/2023

GRIFFING

4. STEP – POSITIONING ON MAIN FRONT

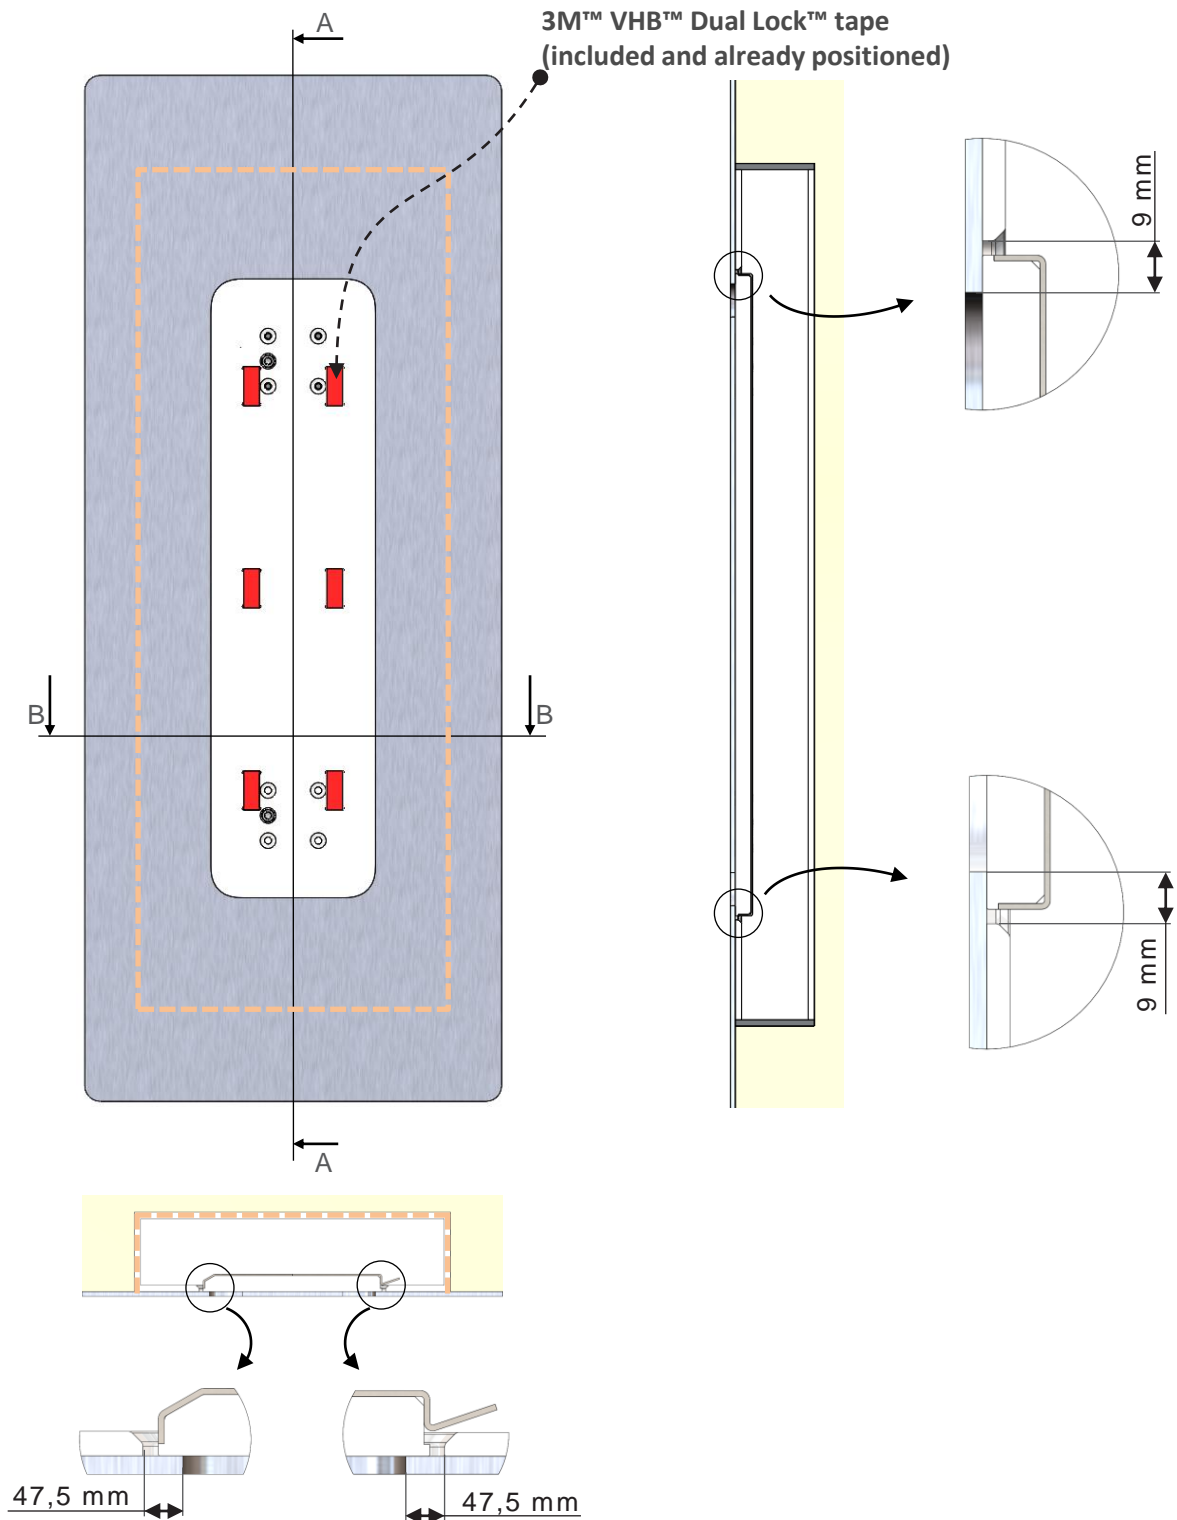

- Tolerance for all positioning dimensions $\pm 0,5$ mm

Data sheet– MYSTIC LINE


#003

Griffing d.o.o. | Rakitnica 41 | 1331 Dolenja vas | Slovenia, EU
sales@griffing.si | www.griffing.si

Data sheet | 24/07/2023

GRIFFING

3. STEP – FRONT INSERT POSITION

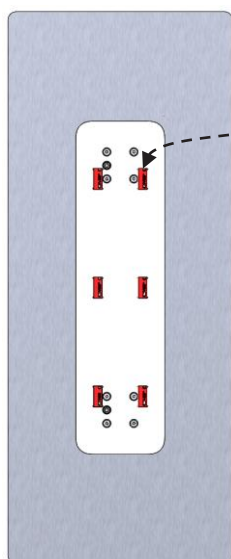

3M™ VHB™ Dual Lock™ tape
(included and already positioned)

- Remote top foil on all tapes
- Number of tape on different types of handle:
 - Type 540 – 6
 - Type 1000 – 10
 - Type 1400 – 12
 - Type 1800 – 14



Insert customer inser with equal min.
gap of 1,5 mm

- When positioned do not remove front for approximetly 24h

5. STEP – Final step

